




## WEB HMI (I series)

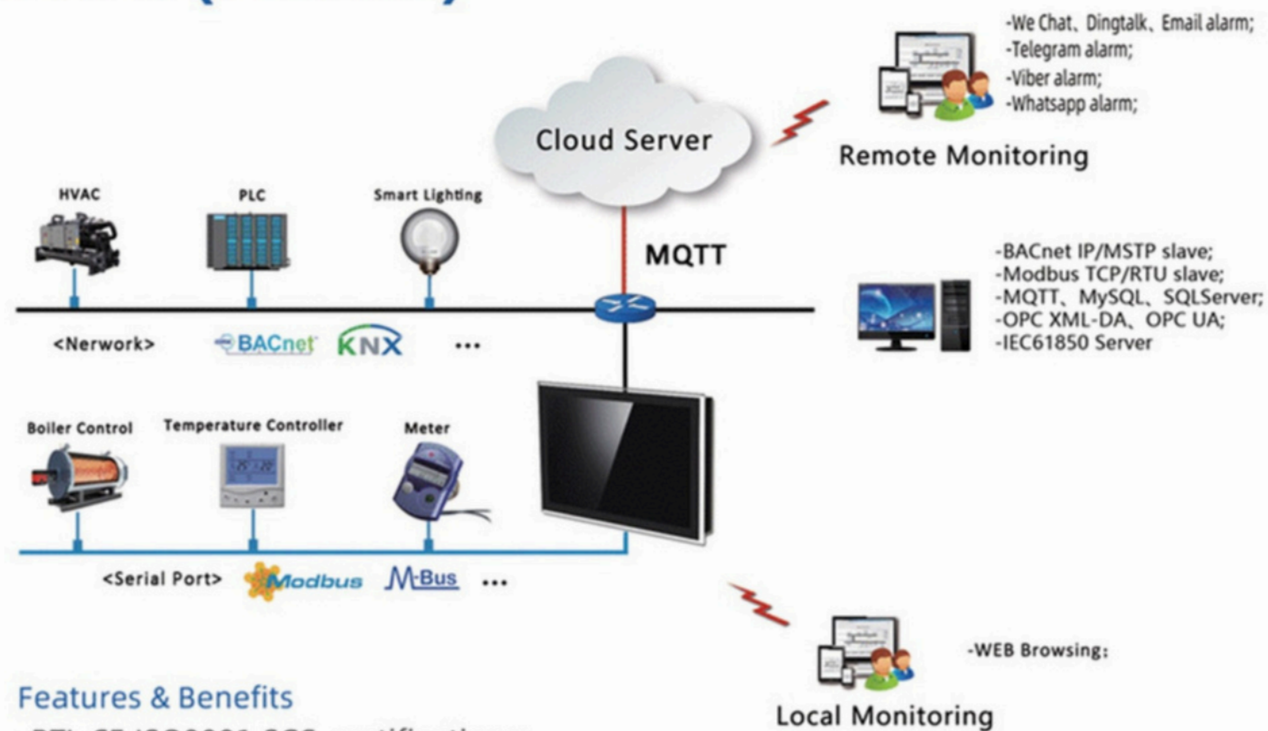


### Features & Benefits

- BTL,CE,ISO9001.SGS certifications;
- 400+ protocols convert to BACnet,Modbus ,MQTT,OPC UA,OPC XML-DA;
- Easy to configure by X2VIEW;
- You can build full SCADA, HMI, and alarming systems, and other applications that put you fully in control of your processes, right from your phone,PC;
- Cloud Platform Integration work with WEB gateway;
- Support converting to BACnet server, Modbus server, MQTT/Cloud server,IEC61850 Server;
- Support WeChat, DingTalk, Telegram,Viber alarm,Whatsapp alarm;
- Support user group management, configuration screen monitoring can set permissions;
- Support various forms of timing, event triggering, and provide a custom function;
- Support local data simulation;
- MapStorage is open, can be customized;
- Support the timer, which can be used to run/stop the device at a fixed time or set values;
- Support remote monitoring of terminal device by smart phone, iPad and PC;
- Support cloud configuration;




Product Model	17-1031	110-1031	115-1031
Support Tags	2048		
Support Protocols	Support More than 400 protocols		
System	Linux		
Processor	4 core 1.2GHz		
Memory	1G		
Flash	8G		
Ethernet	1 x 10M/100M NIC		
Serial Port	3 RS485 serial ports, 1 RS232 serial port		
Power Supply	AC/DC 12V-24V (DC is recommended)	DC 24V	
Touch Type	Capacitive Touch screen		
Displayer	7" TFT	10.1" TFT	15.6" TFT
Hole Size/mm	180mm×114mm	242mm×163mm	242mm×163mm
Resolution/pixel	1024×600	1280×800	1920×1080
Material	Aluminum alloy front shell, sheet metal rear shell		
Weight	0.65Kg	1.30kg	2.8Kg
Power consumption	≤8W	≤10W	≤15W
Temperature	-10 ~ 50°C(working) -20 ~ 70°C(storage and transportation)		
Humidity	10% ~ 90% non-condensing (working) 15% ~ 95% non-condensing (storage and transportation)		

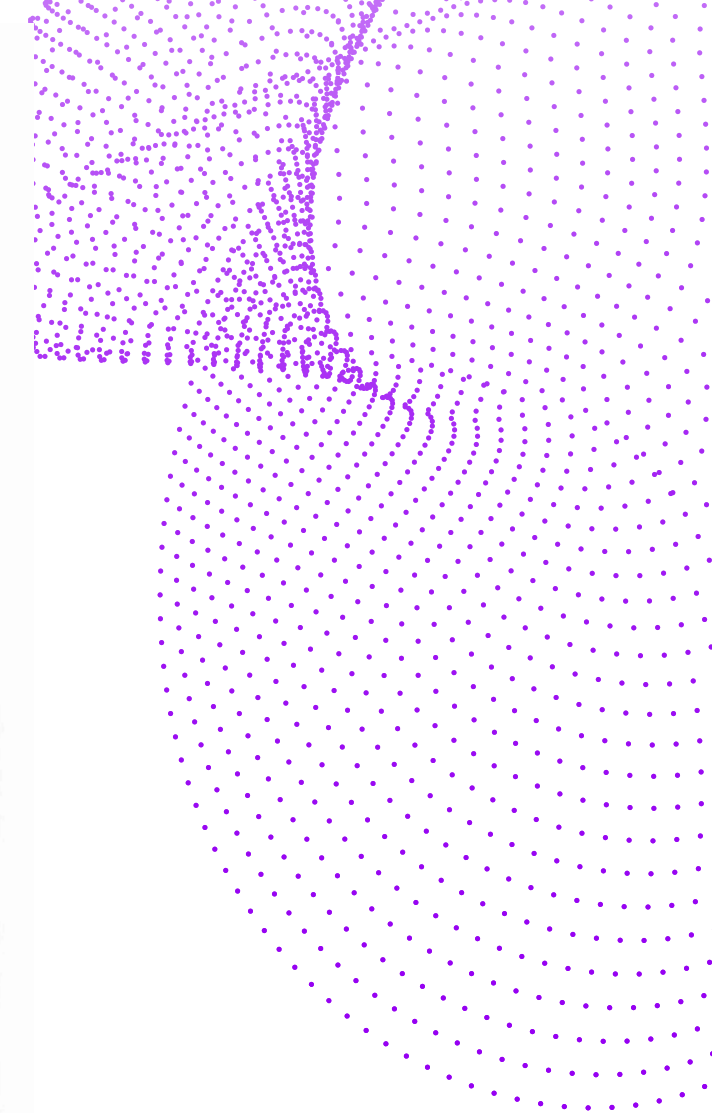



## WEB HMI (I series)

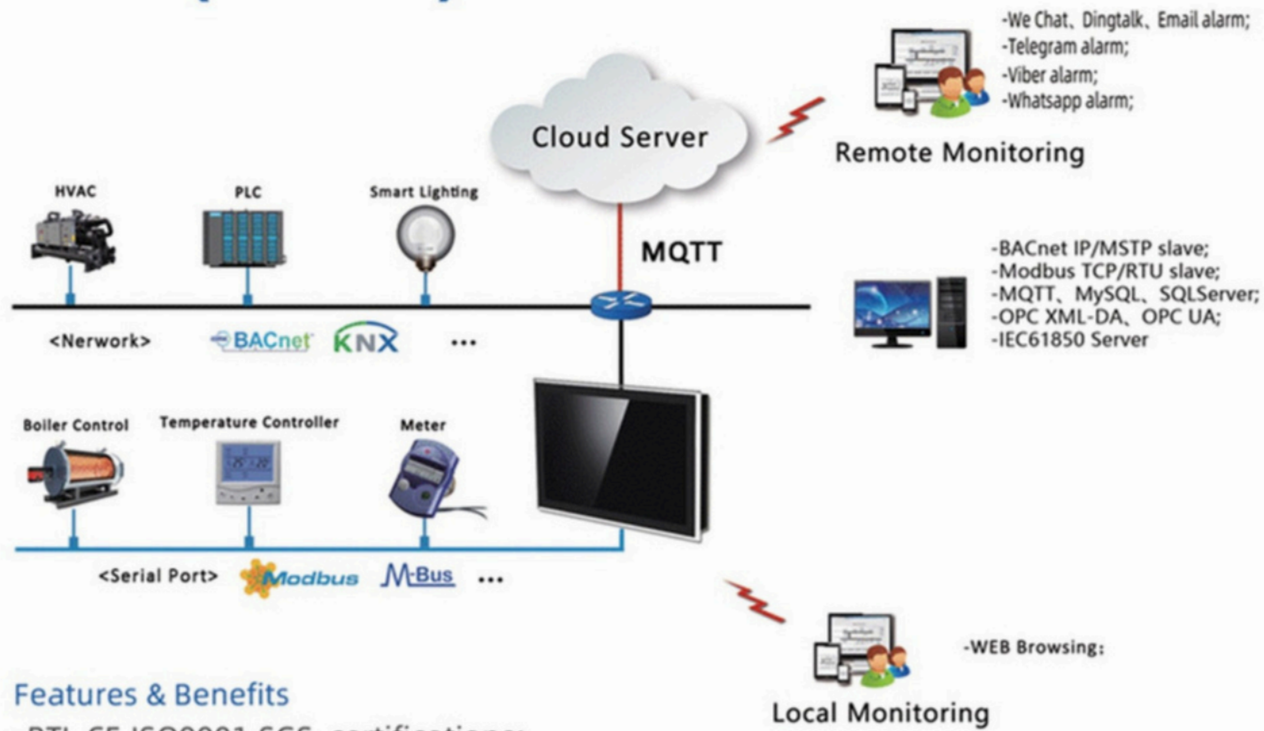

### Features & Benefits

- BTL,CE,ISO9001.SGS certifications;
- 400+ protocols convert to BACnet,Modbus ,MQTT,OPC UA,OPC XML-DA;
- Easy to configure by X2VIEW;
- You can build full SCADA, HMI, and alarming systems, and other applications that put you fully in control of your processes, right from your phone,PC;
- Cloud Platform Integration work with WEB gateway;
- Support converting to BACnet server, Modbus server, MQTT/Cloud server,IEC61850 Server;
- Support WeChat, DingTalk, Telegram,Viber alarm,Whatsapp alarm;
- Support user group management, configuration screen monitoring can set permissions;
- Support various forms of timing, event triggering, and provide a custom function;
- Support local data simulation;
- MapStorage is open, can be customized;
- Support the timer, which can be used to run/stop the device at a fixed time or set values;
- Support remote monitoring of terminal device by smart phone, iPad and PC;
- Support cloud configuration;



Product Model	17-1031	110-1031	115-1031
Support Tags	2048		
Support Protocols	Support More than 400 protocols		
System	Linux		
Processor	4 core 1.2GHz		
Memory	1G		
Flash	8G		
Ethernet	1 x 10M/100M NIC		
Serial Port	3 RS485 serial ports, 1 RS232 serial port		
Power Supply	AC/DC 12V-24V (DC is recommended)	DC 24V	
Touch Type	Capacitive Touch screen		
Displayer	7" TFT	10.1" TFT	15.6" TFT
Hole Size/mm	180mm×114mm	242mm×163mm	242mm×163mm
Resolution/pixel	1024×600	1280×800	1920×1080
Material	Aluminum alloy front shell, sheet metal rear shell		
Weight	0.65Kg	1.30kg	2.8Kg
Power consumption	≤8W	≤10W	≤15W
Temperature	-10 ~ 50°C(working) -20 ~ 70°C(storage and transportation)		
Humidity	10% ~ 90% non-condensing (working) 15% ~ 95% non-condensing (storage and transportation)		

